


# 120 Series FLOAT VALVE

**Philmac®**

The connection you can trust.

## TECHNICAL SPECIFICATIONS

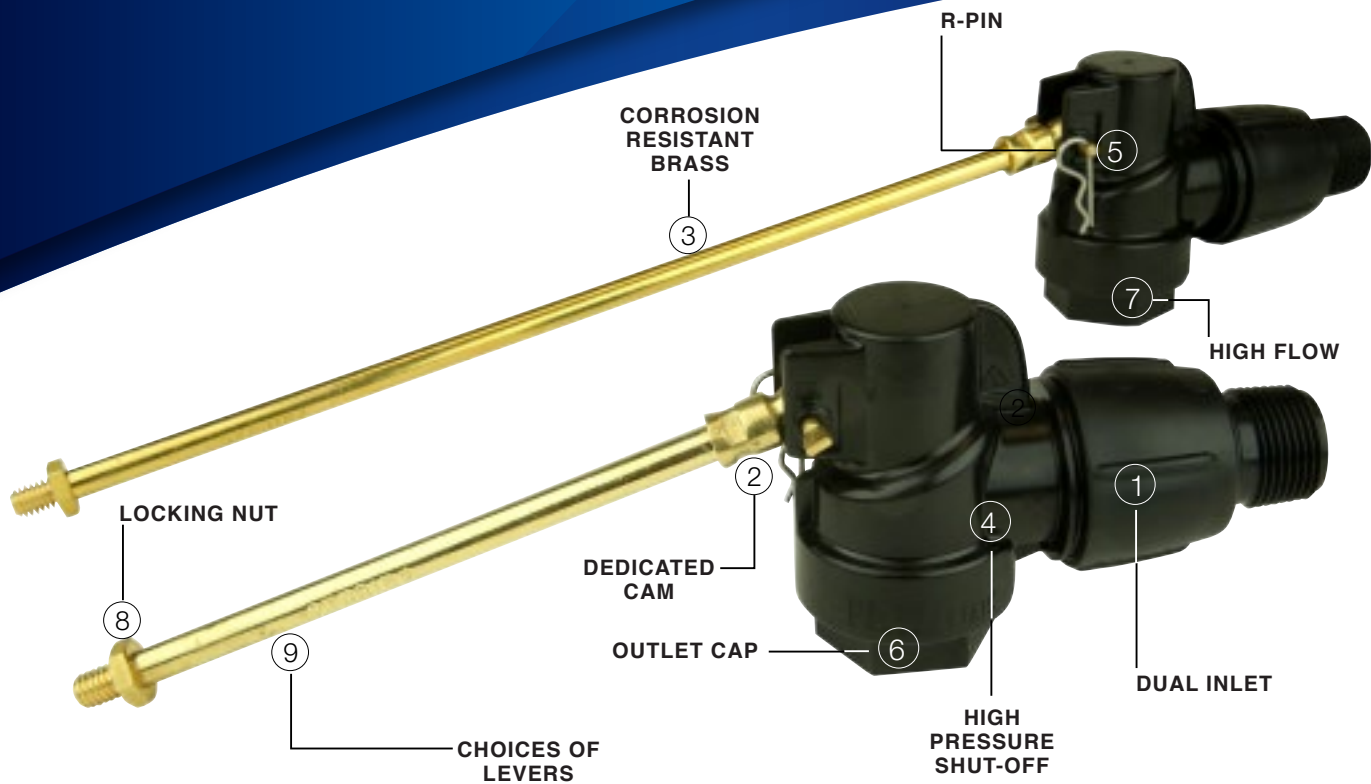

**(1) Dual Intent** – The valves come standard with a 3/4" BSP male inlet and a 1" BSP male inlet. This means one valve suits troughs with a 3/4" or 1" connections. This means less valves need to be stocked.

**(2) Dedicated Cam** – Rather than a one-piece lever with a narrow cam this dedicated cam is wider and has significantly greater strength. It provides greater resistance to damage by stock.

**(3) Corrosion Resistant Brass** – The lever assembly and pivot pin are manufactured from DZR (dezincification resistant) brass. This means they resist corrosion. This prevents the weakening of the brass leading to premature failure.

**(4) High Pressure Shut-Off** – The combination of body design, lever length and float size (6" or 150mm) provides high pressure shut-off. With an inlet pressure up to 1200 kPa (Standard Lever) the valve will not leak. This makes it suited to installations such as at the bottoms of hills.

**(5) R-Pin** – A pivot pin and stainless R-Pin hold the lever assembly in place. The pivot pin can be removed without any tools, which makes lever adjustment, installation and maintenance a simple task and saves time and effort.

**(6) Outlet Cap** – The outlet cap has moulded, scientifically engineered flow directors. This minimises the rosette effect, which causes unnecessary splashing, and saves water.

**(7) High Flow** – Across the range of inlet pressures the valve has a high flow. This means it can fill troughs quickly thus providing sufficient water to meet the demands of the stock.

**(8) Locking Nut** – Each lever has a nut fitted to the end. This nut locks the float in place to prevent it from coming undone. This provides peace of mind that the float cannot come loose and precious water be lost.


**(9) Choices of Levers** – Two lever lengths are available. The standard (295mm) and a short (165mm) lever for smaller troughs or troughs with smaller chambers. This means one valve suits a greater range of troughs.

# 120 Series FLOAT VALVE



The connection you can trust.


## TECHNICAL SPECIFICATIONS

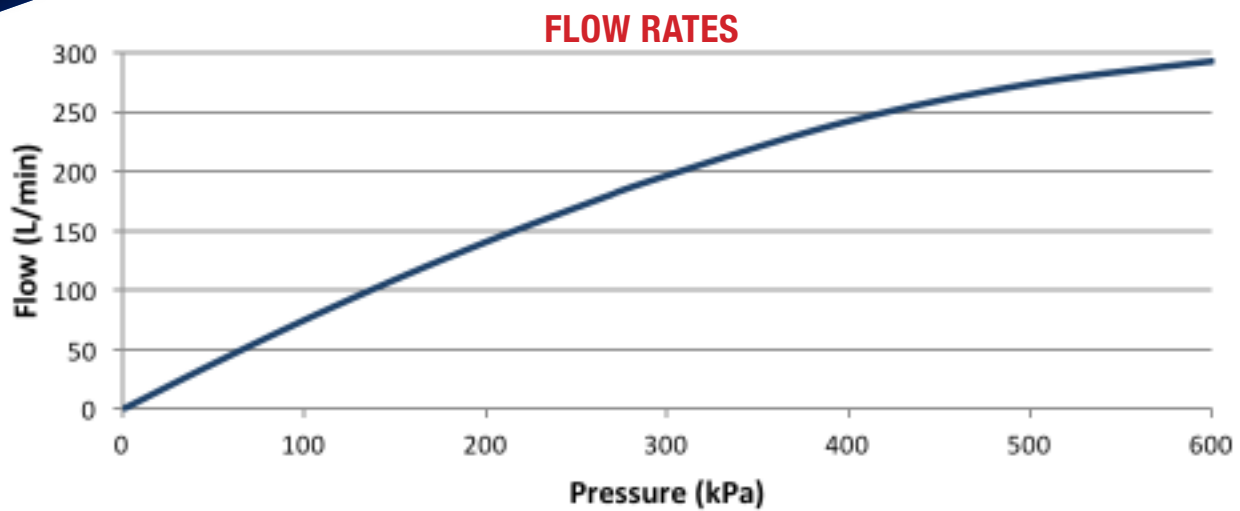

**FLOW RATES (L/min)**

Inlet size (BSP)	Inlet Pressure (kPa)					
	100	200	300	400	600	800
3/4" or 1"	75	135	200	242	293	315

**Operating Pressure:** 10 - 1200 kPa  
10 - 1000 kPa (Short Lever)

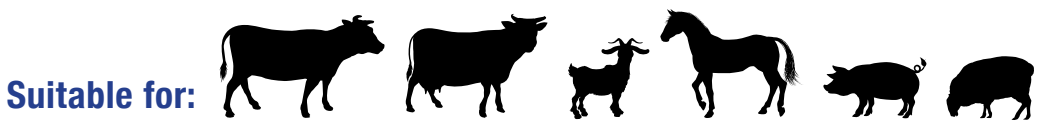

**Suits trough capacity:** Up to 1500 litres

**Installation options:** Top and Side

**Float Size:** 6" (150) round (Part #90499600)

**Inlet Thread:** 3/4" or 1" BSP

**Lever Thread:** 5/16" BSW

**Lever Length (pivot pin to start of thread):** 295mm & 165mm (short lever)