


Brass 'Y' Strainer

F & F 'Y' Type Line Strainer - One Way Valve

PRODUCT DATASHEET

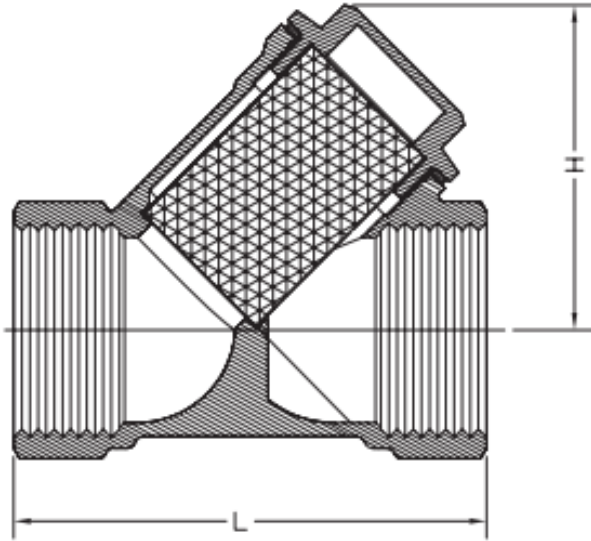

Specifications

- Max Cold Water Working Pressure: 1600 kPa (16 Bar)
- Water Working Temperature: 0°C to 100°C
- Thread: BSP to ISO 228
- Mesh Diameter: 0.8mm
- Mesh Centre to Centre: 1mm
- Filtration degree: 1/2" to 2": 500Qm & 2 1/2 to 4": 800Qm

Features


- Designed for inline water delivery and suction services.
- Designed to be installed with the arrow on the body of the valve following the same water flow direction
- Comes with a removeable strainer cartridge allowing built up debris to be removed.

Dimensions (mm)

Size	L	H
15mm (1/2")	65	34
20mm (3/4")	80	42
25mm (1")	96	48
32mm (1 1/4")	104	55
40mm (1 1/2")	116	66
50mm (2")	140	74
65mm (2 1/2")	168	85
80mm (3")	175	115
100mm (4")	220	160

Materials

#	PART	MATERIAL
1	Body	Brass
2	Strainer	304 Stainless Steel
3	O-ring	NBR
4	End Adaptor	Brass

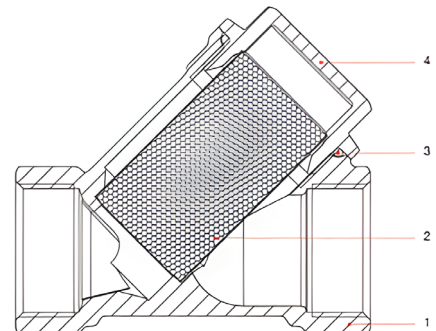

Warranty

24 months

For Further Information

📧 info@valvewarehouseaustralia.com.au

☎ 03 9421 0042

Valve Warehouse ABN 33 632 515 149