



# 304 Stainless Steel Screwed Strainer

Suitable for Air & Water Use - Male BSP

#### **PRODUCT DATASHEET**



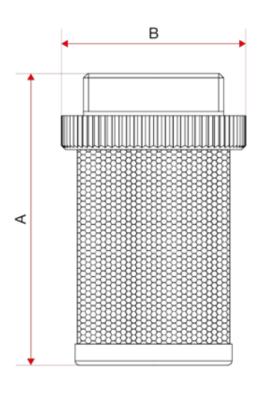

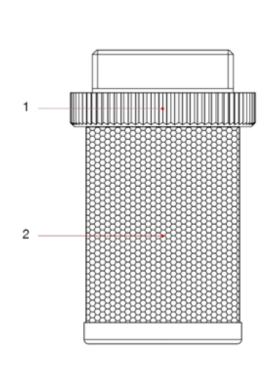

### **Specifications**

- Sizes 3/8" to 2" Filtration Degree: 1200Qm
- Sizes 21/2" to 4" Filtration Degree: 1700Qm
- Thread: BSP to ISO 228

#### Features

- Can be installed in any position: vertical, horizontal or oblique
- Designed to be screwed onto a spring-loaded check valve

## **Dimensions** (mm)

Size	A	В
10mm (3/8")	42	25.7
15mm (1/2")	47	30
20mm (3/4")	58	35.9
25mm (1")	70	43.9
32mm (11/4")	76	50.9
40mm (11/2")	83	56.9
50mm (2")	99.5	68.9
65mm (21/2")	123	86
80mm (3")	138	102
100mm (4")	152.5	129

### Materials

#	PART	MATERIAL	
1	End Adapter	Polymer	
2	Strainer	304 Stainless Steel	

## Warranty

O3 9421 0042