


# Rubber Vibration Eliminator - Table E

Rubber Bellow - Flexible Joint Coupling

PRODUCT DATASHEET

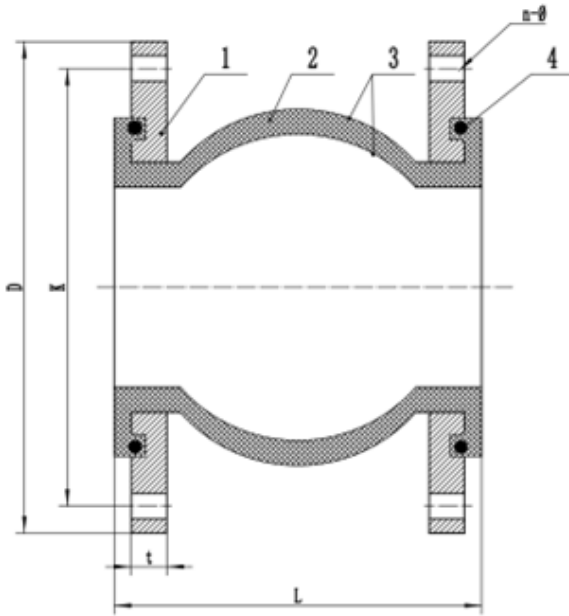

## Features

- Installed in water and air piping systems to absorb axial, lateral and angular movements
- Can handle angular deflection up to 15 degrees
- Some sizes are also available in Table D upon request

## Specifications

- Max Working Pressure: 1600 kPa (16 Bar)
- Flange Drilling: Table E AS2129
- Temperature Range: -30°C to 120°C

## Dimensions (mm)

Size	L	D	K	t	n-O	Class
50mm (2")	105	150	114	15	4-18	PN16
65mm (2 1/2")	115	165	127	15	4-18	PN16
80mm (3")	135	185	146	17	4-18	PN16
100mm (4")	135	215	178	17	8-18	PN16
125mm (5")	165	255	210	19	8-18	PN16
150mm (6")	180	280	235	21	8-22	PN16
200mm (8")	205	335	292	21	8-22	PN16
250mm (10")	230	405	356	22	12-22	PN16
300mm (12")	265	455	406	25	12-26	PN16
350mm (14")	265	525	470	29	12-26	PN16
400mm (16")	265	580	521	32	12-26	PN16
450mm (18")	265	640	584	35	16-26	PN16

## Materials

#	PART	MATERIAL
1	Flange	Carbon Steel Galvanised
2	Frame	Nylon Cord Fabric
3	Outer / Inner Layer	EPDM Rubber
4	Pressure Balance Ring	Hard Steel Wire

## Warranty

24 months

### For Further Information

📧 info@valvewarehouseaustralia.com.au

☎ 03 9421 0042

Valve Warehouse ABN 33 632 515 149