


316 Stainless Steel Gate Valve

Female x Female BSP

PRODUCT DATASHEET

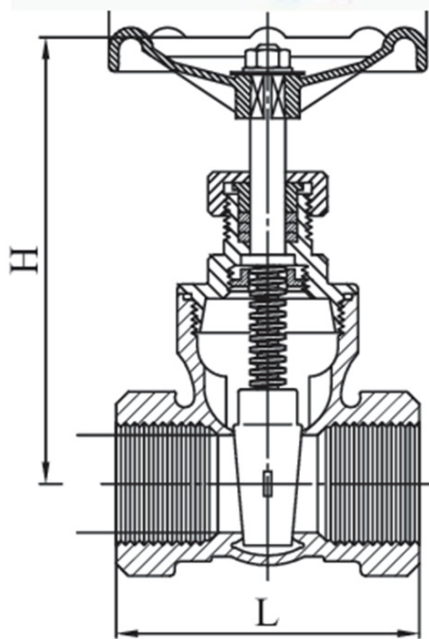

Features

- Suitable for isolating and controlling the flow of hot & cold non-potable water in a pipeline
- Designed to be operated with the gate either fully open or closed, however the gate can be left partially open to regulate flow.
- The length of the gate valve body is shorter compared to other types of valves and is beneficial when there is reduced space along the pipe.
- Commonly used in the food processing and marine service industries due to its strong resistance to corrosion and ability to work under high working temperatures.

Specifications

- Cold Working Pressure: 1400 kPa (14 BAR)
- Max Working Temperature: 180°C
- Thread: Female BSP to ISO 228 / AS 1722.1
- Clockwise to close

Dimensions (mm)

Size	L	H	W
15mm (1/2")	55	90	70
20mm (3/4")	66	98	70
25mm (1")	70	108	80
32mm (1 1/4")	75	120	90
40mm (1 1/2")	85	146	90
50mm (2")	95	162	100
65mm (2 1/2")	116	213	140
80mm (3")	130	241	140

Materials

#	PART	MATERIAL
1	Body	316 Stainless Steel (CF8M)
2	Stern	316 Stainless Steel
3	Bonnet	316 Stainless Steel (CF8M)
4	Wedge	316 Stainless Steel (CF8M)
5	Gasket	PTFE

Warranty

24 months

For Further Information

📧 info@valvewarehouseaustralia.com.au

☎ 03 9421 0042

Valve Warehouse ABN 33 632 515 149