



Philmac

The connection you can trust.


Landscape Stake

Technical Specifications Sheet

A purpose built stake featuring the proven "hammer head" design.

Operation

- > Screwed inlet accepts a variety of 4mm emitters.

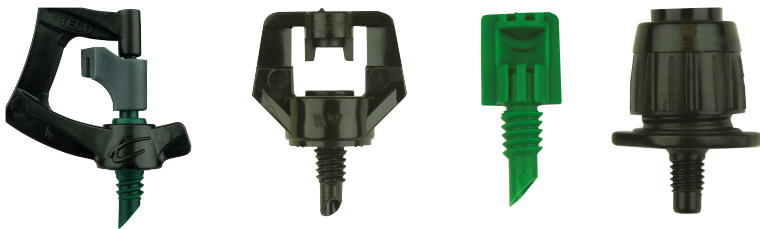

Application

- > Positioned away from the main tube, the stake can be moved around as plants develop, providing the most professional method of installation. Retention hole allows for tidy placement of supply tube.

Convenience

- > Simple snap-off adaptor for quick connection to lateral.

Material

- > Tough engineering plastic ensures trouble-free installation and service life.



Landscape Stake


Philmac

The connection you can trust.

Material Specifications - Top Hat Grommets

A rigid riser can be mounted on the landscape stake to increase the height of the jet.

Suitable for a variety of emitters.

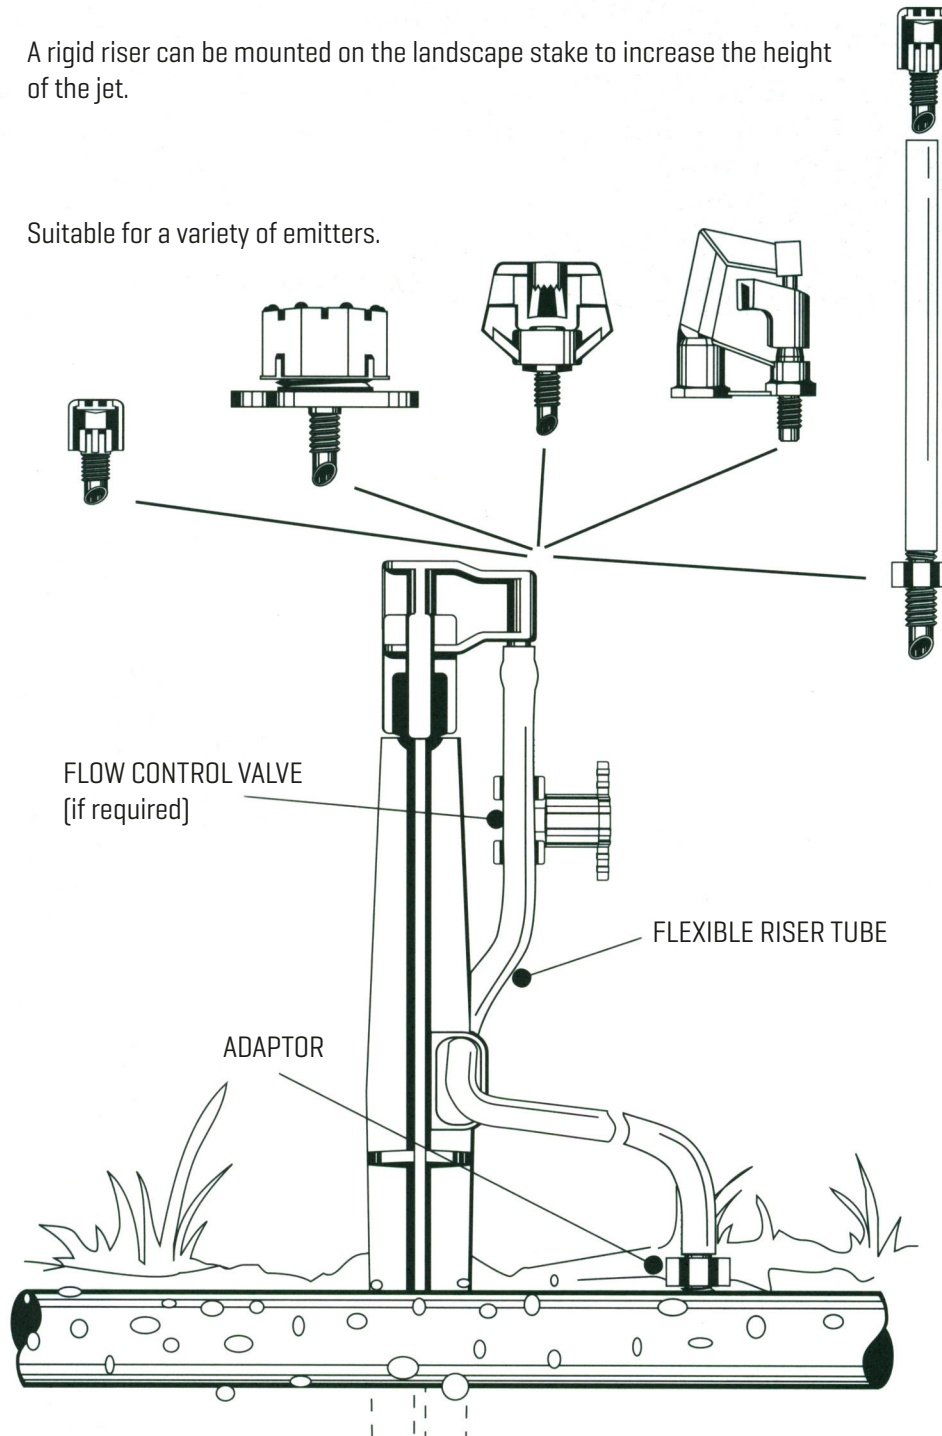

RECOMMENDED USE:

Products described above are designed and manufactured for micro irrigation use and therefore have a maximum recommended operating pressure of 300kPa. The products must be used with suitable filtration (where applicable) to avoid blockage or damage to working components.

Please note that the information, opinions, recommendations and advice given on this specification sheet are supplied only to provide an improved understanding of the technical aspects of Philmac products. So far as the law allows, Philmac Pty. Ltd. will not accept liability in respect of any loss or damage of any kind claimed to arise as result of reliance upon any information contained on this specification sheet. Please to our terms & conditions of supply: <https://www.philmac.com.au/terms-conditions-supply/>.

For more information

Ph: 1800 755 899

www.philmac.com.au

www.youtube.com/user/PhilmacAustralia

PHI1722 8/24