

AP

Acetyl Full Flow, Large & Medium Trough Valve

APEX
VALVES
A WATTS Brand



APPLICATION

Acetyl sleeve valve for fast filling medium troughs.

FEATURES & BENEFITS

- Full flow design
- Fully serviceable

SPECIFICATIONS

Working Pressure: 0 - 1200 kPa (175 psi)

Flow Rate: 310 L/min (70 gal/min) @ 1200 kPa (175 psi)

Temperature Range: 1°C - 60°C (34°F - 140°F)


AVAILABLE SIZES

- 20mm (¾") with 25mm (1") increasing bush
- 20mm (¾")
- 25mm (1")

SPARES & ACCESSORIES

- Cord and nipple
- Short arm (length: 195mm [7 ¾"])
- Standard arm (length: 352mm [13 7/8"])
- Use 150mm (6") ball float
- Service Kit (contains plunger, o-ring, washer, cotter pin)

APEX ACETYL FULL FLOW VALVE FLOW RATE

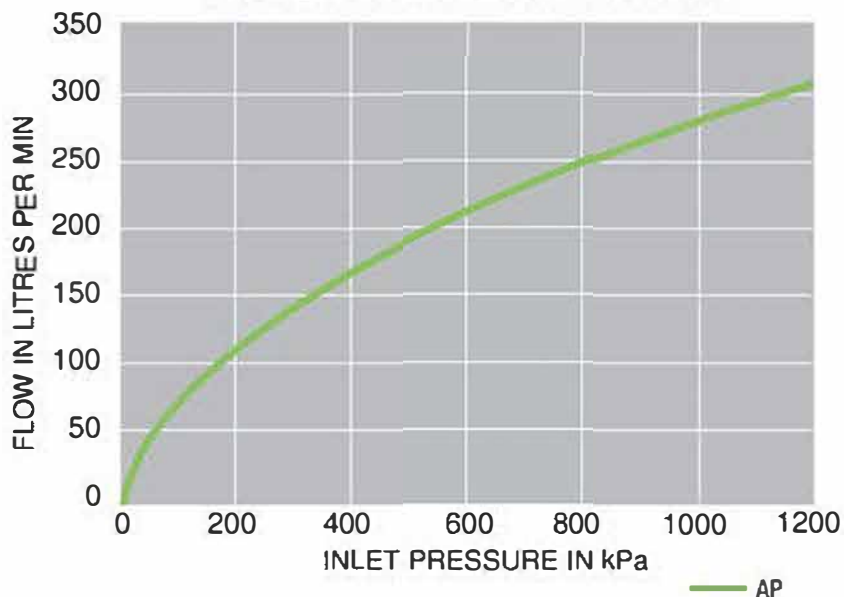

GRAPH CONVERSIONS

1 kPa = 0.145 psi = 0.01 bar

1 L/min. = 0.22 Imperial gpm

For Further Information

📧 info@valvewarehouseaustralia.com.au


☎ 03 9421 0042

Valve Warehouse ABN 33 632 515 149

Warranty


24 months



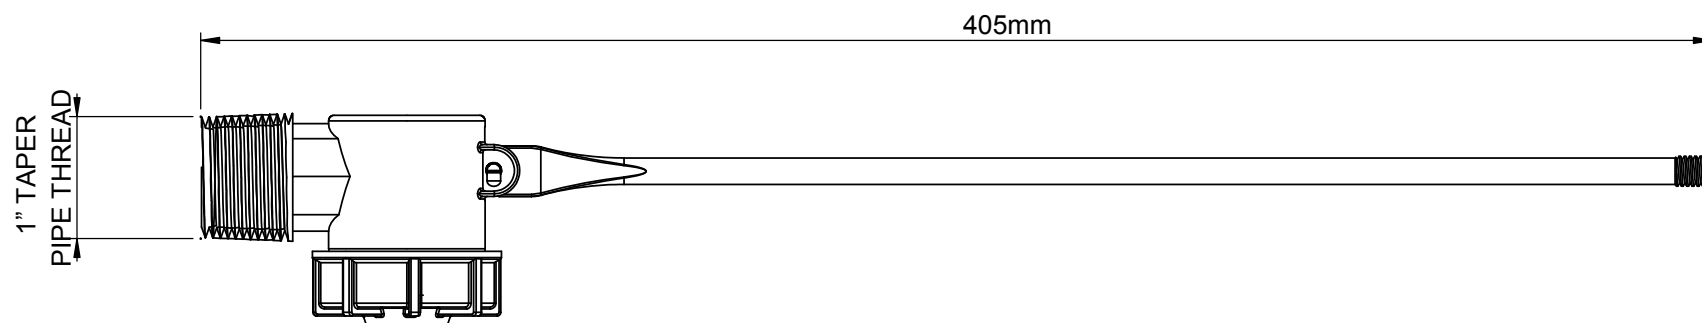

Apex acetyl full flow APT-25

Copyright 2006 **APEX[®]**
V A L V E S

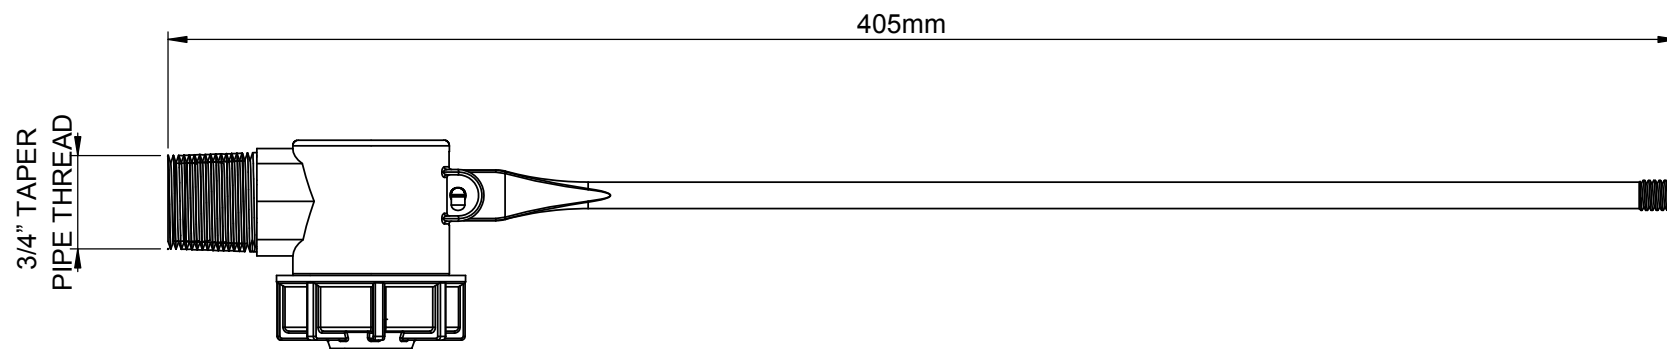

Apex acetyl full flow APT-20

Copyright 2006 **APEX[®]**
V A L V E S