


Stainless Steel Foot Valve

Stainless Steel 316 Foot Valve Flanged Table D

PRODUCT DATASHEET

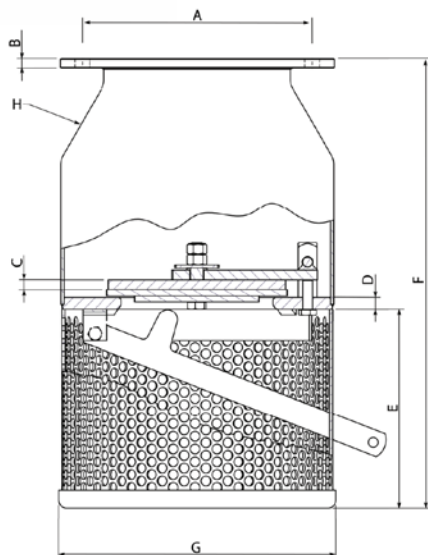

Features

- Excellent resistance to corrosion and harsh environments
- Table D flanged connection for secure installation
- Prevents reverse flow and maintains pump prime
- Suitable for water, chemical, and marine applications
- Heavy-duty construction for long-term reliability
- Undrilled flange available

Materials

Apart from the Foot valve's Clack Rubber, all components are manufactured using 316 Stainless Steel, even the fastenings.

Dimensions (mm)

Size		A	B	C	D	E	F	G	H	Weight approx kgs
mm	inches	mm	mm	mm	mm	mm	mm	mm	mm	
80	3	146	10	10	12	178	372	188	3	10
100	4	178	10	10	12	178	393	220	3	11.7
125	5	210	10	10	12	203	448	258	3	16.2
150	6	235	10	10	12	203	459	283	3	18.5
175	7	260	10	10	12	230	500	310	2	20
200	8	292	12	12	16	278	595	340	3	30
225	9	324	12	12	16	280	610	373	2	36
250	10	356	12	12	16	312	676	405	3	42
300	12	406	12	12	16	364	776	455	3	53
350	14	470	16	16	20	408	897	525	3	82.5
375	15	495	16	16	20	432	920	550	2	86.5
400	16	521	16	16	20	470	975	585	2	98.4
450	18	584	20	20	25	505	1105	645	3	139
500	20	641	20	20	25	555	1180	710	3	178
600	24	756	20	20	25	665	1390	830	3	246
660	26	813	20	20	25	725	1510	875	3	280
750	30	927	25	20	32	820	1660	995	6	500

Warranty

24 months

For Further Information

📧 info@valvewarehouseaustralia.com.au

☎ 03 9421 0042

Valve Warehouse ABN 33 632 515 149